

KT-DPF multi-range cable grommets, grey


in pyramid shape, for cable diameters 3-26 mm / IP54 / UL Type 12



The KT-DPF grommets accept a wide range of cable diameters. A great benefit when the exact cable diameter is not known in advance. Due to the flexibility and unique pyramid shape, routing and flexible positioning of rigid cables is much easier compared to using conventional cable glands.

The KT-DPF grommets are not split and therefore only usable for cables without connectors.

Cutting of KT-DPF grommets: Cable diameter less 20%. It is recommended that additional strain relief be provided for the cables using a cable tie.

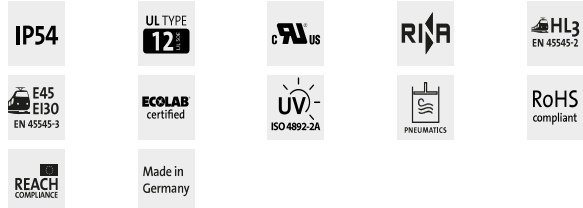

Specifications


IP rating (EN 60529)	IP54
UL Type (UL 50E)	UL Type 12
Material	Elastomer
Flame class	UL94-V0, self-extinguishing
Operating temperature	-40 C° to 100 C°
Properties	silicone free, halogen free

Advantages & benefits

- Large clamping range of 3 to 26 mm with only 3 grommets
- Ideal for wiring non pre-terminated cables locally
- Easy storage

Product types & sizes

KT-DPF-A gy



Part No.	41260
EAN	4251269306730
PU	10
For max. no. of cables	1
Colour	grau (ähnlich RAL 7035)
Length	21 mm
Width	21 mm

Height	50 mm
Mounting height	33 mm
For cable type	Rundleitung
Clamping range	1 x 3 - 12 mm

KT-DPF-B gy



Part No.	41261
EAN	4251269306747
PU	10
For max. no. of cables	1
Colour	grau (ähnlich RAL 7035)
Length	41,5 mm
Width	42 mm

Height	59 mm
Mounting height	42 mm
For cable type	Rundleitung
Clamping range	1 x 4 - 18 mm

KT-DPF-C gy



Part No.

41262

EAN

4251269306754

PU

10

For max. no. of cables

1

Colour

grau (ähnlich RAL 7035)

Length

41,5 mm

Width

42 mm

Height

59 mm

Mounting height

42 mm

For cable type

Rundleitung

Clamping range

1 x 14 - 26 mm

□