



With its compact design and 190° rotating tube, the ALLIO system luminaire offers space-saving lighting for enclosures. This also enables easy retrofitting in existing enclosures.

The High Power LED illuminates with 1050 lumens and offers a service life of 50,000 hours. The opal white polycarbonate tube provides a homogeneous, glare-free area light.

#### UL Certificates:

[UL-US-2442933-0 \(USA\)](#)

[UL-CA-2432446-0 \(Canada\)](#)

IP20



IK07

IK08

RoHS  
compliant



Made in  
Germany

Borrow a sample now




## Specifikationer


<b>IP-Klass (EN 60529)</b>	IP20
<b>Protection class</b>	II (Protective insulation)
<b>Material</b>	Tube: Polycarbonate Enclosure: Polycarbonate
<b>Brandklass</b>	
<b>Temperatur</b>	-20 C° till 50 C°
<b>Monteringstyp</b>	Skruvmontering, Magnetic attachment, Clip attachment (patented)

## Produkttyper och storlekar

## Fördelar

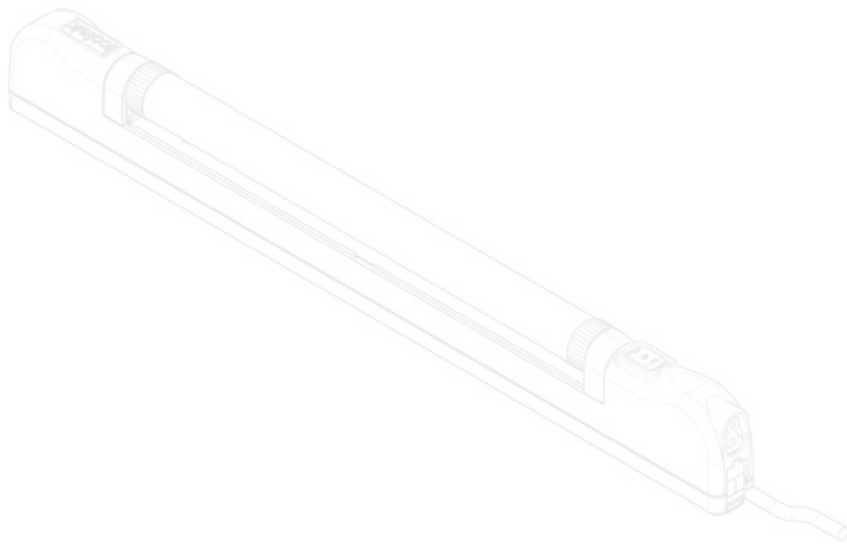

ArtNr.	<b>81100</b>	Length	<b>3.000 mm</b>
EAN	<b>4251269333</b>	connecting cable	
	<b>019</b>	Version	<b>Standard</b>
Antal	<b>1</b>	Connection possibilities	<b>Door operated switch</b>
UL-certifikat	-	Plugg typ	<b>Ferrules</b>
Längd	<b>448 mm</b>	Rated power	<b>8 W</b>
Höjd	<b>56,5 mm</b>	Operating voltage	<b>24 V DC</b>
Bredd	<b>26,2 mm</b>	Test standard	<b>EN 60598, EN 55015, EN 61000, EN 62741</b>
		Guidelines	<b>2014/35/EU, 2014/30/EU</b>
		Service life	<b>50.000 h</b>
		Energy efficiency class	<b>E</b>
		Colour temperature	<b>5.600 K</b>
		Colour rendering index CRI	<b>&gt; 80</b>
		Luminous flux	<b>1.000 lm</b>
		Färg	<b>grå (liknande RAL 7035)</b>

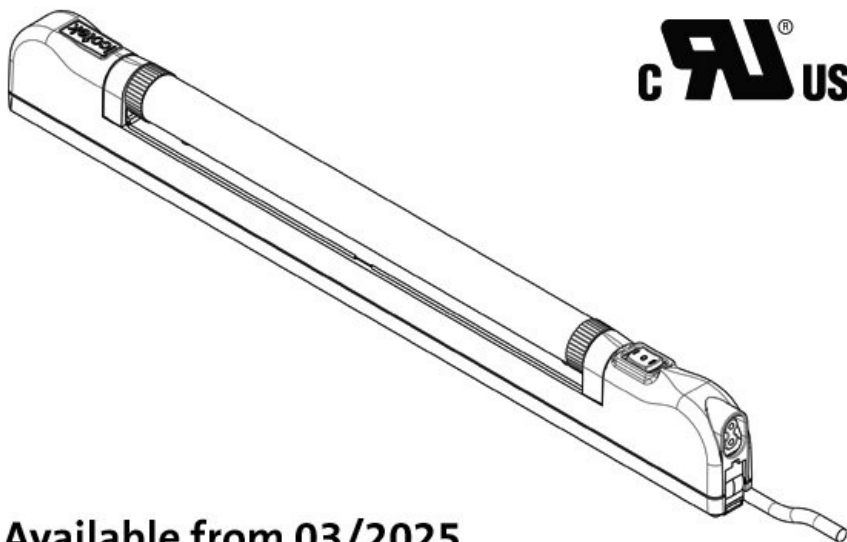


ArtNr.	<b>81202</b>	Length	<b>3.000 mm</b>
EAN		connecting cable	
Antal	<b>1</b>	Version	<b>Standard</b>
UL-certifikat	<b>UL-US-2442933-0 / UL-CA-2432446-0</b>	Connection possibilities	<b>Door operated switch</b>
Längd	<b>448 mm</b>	Plugg typ	<b>Ferrules</b>
Höjd	<b>56,5 mm</b>	Rated power	<b>8 W</b>
Bredd	<b>26,2 mm</b>	Operating voltage	<b>24 V DC ±5%</b>
		Test standard	<b>EN 60598, EN 55015, EN 61000, EN 62741</b>
		Guidelines	<b>2014/35/EU, 2014/30/EU</b>
		Service life	<b>50.000 h</b>
		Energy efficiency class	<b>E</b>
		Colour temperature	<b>5.600 K</b>
		Colour rendering index CRI	<b>&gt; 80</b>
		Luminous flux	<b>1.000 lm</b>
		Färg	<b>grå (liknande RAL 7035)</b>

**Available from 03/2025**




ArtNr.	<b>81101</b>	Length	<b>3.000 mm</b>
EAN	<b>4251269333026</b>	connecting cable	
Antal	<b>1</b>	Version	<b>PIR motion detector</b>
UL-certifikat	-	Plugg typ	<b>Ferrules</b>
Längd	<b>448 mm</b>	Rated power	<b>8 W</b>
Höjd	<b>56,5 mm</b>	Operating voltage	<b>24 V DC</b>
Bredd	<b>26,2 mm</b>	Test standard	<b>EN 60598, EN 55015, EN 61000, EN 62741</b>
		Guidelines	<b>2014/35/EU, 2014/30/EU</b>
		Service life	<b>50.000 h</b>
		Energy efficiency class	<b>E</b>
		Colour temperature	<b>5.600 K</b>
		Colour rendering index CRI	<b>&gt; 80</b>
		Luminous flux	<b>1.000 lm</b>
		Färg	<b>grå (liknande RAL 7035)</b>

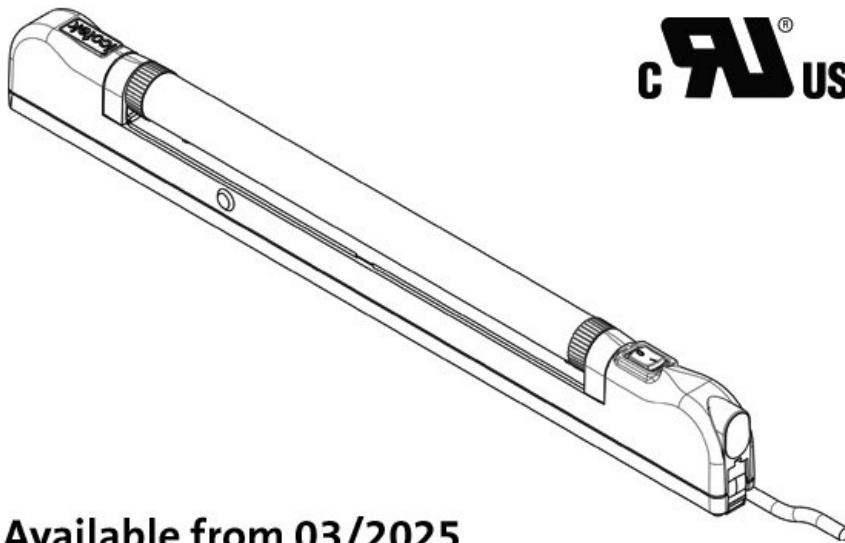


ArtNr.	<b>81203</b>	Length	<b>3.000 mm</b>
EAN		connecting cable	
Antal	<b>1</b>	Version	<b>PIR motion detector</b>
UL-certifikat	<b>UL-US-2442933-0 / UL-CA-2432446-0</b>	Plugg typ	<b>Ferrules</b>
Längd	<b>448 mm</b>	Rated power	<b>8 W</b>
Höjd	<b>56,5 mm</b>	Operating voltage	<b>24 V DC ±5%</b>
Bredd	<b>26,2 mm</b>	Test standard	<b>EN 60598, EN 55015, EN 61000, EN 62741</b>
		Guidelines	<b>2014/35/EU, 2014/30/EU</b>
		Service life	<b>50.000 h</b>
		Energy efficiency class	<b>E</b>
		Colour temperature	<b>5.600 K</b>
		Colour rendering index CRI	<b>&gt; 80</b>
		Luminous flux	<b>1.000 lm</b>
		Färg	<b>grå (liknande RAL 7035)</b>


**Available from 03/2025**

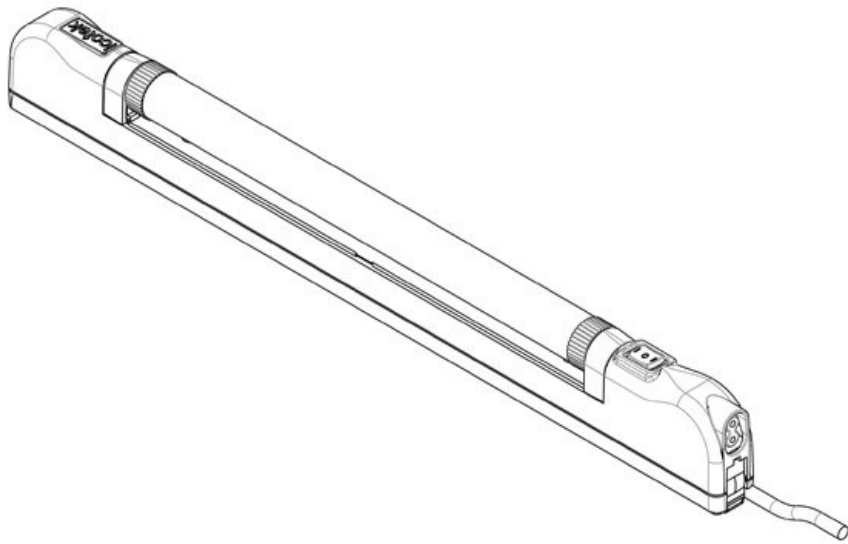

ArtNr.	<b>81102</b>	Length	<b>3.000 mm</b>
EAN	<b>4251269333</b>	connecting cable	
	<b>033</b>	Version	<b>Standard</b>
Antal	<b>1</b>	Connection possibilities	<b>Door operated switch</b>
UL-certifikat	-	Plugg typ	<b>Ferrules</b>
Längd	<b>448 mm</b>	Rated power	<b>8 W</b>
Höjd	<b>56,5 mm</b>	Operating voltage	<b>220 - 240 V AC, 50 - 60 Hz</b>
Bredd	<b>26,2 mm</b>	Test standard	<b>EN 60598, EN 55015, EN 61000, EN 62741</b>
		Guidelines	<b>2014/35/EU, 2014/30/EU</b>
		Service life	<b>50.000 h</b>
		Energy efficiency class	<b>E</b>
		Colour temperature	<b>5.600 K</b>
		Colour rendering index CRI	<b>&gt; 80</b>
		Luminous flux	<b>1.000 lm</b>
		Färg	<b>grå (liknande RAL 7035)</b>

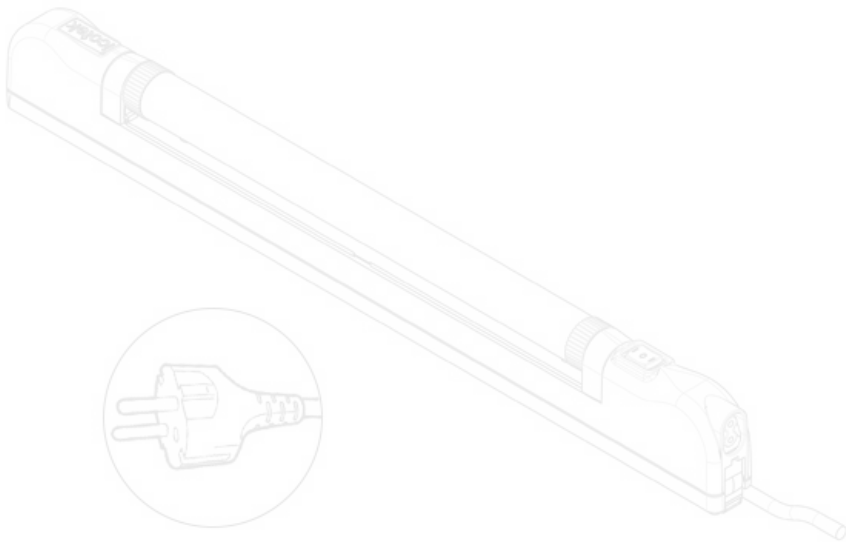

ArtNr.	<b>81103</b>	Length	<b>1.500 mm</b>
EAN	<b>4251269333</b>	connecting cable	
	<b>040</b>	Version	<b>Standard</b>
Antal	<b>1</b>	Connection possibilities	<b>Door operated switch</b>
UL-certifikat	-	Plugg typ	<b>Plug CEE 7/17</b>
Längd	<b>448 mm</b>	Rated power	<b>8 W</b>
Höjd	<b>56,5 mm</b>	Operating voltage	<b>220 - 240 V AC, 50 - 60 Hz</b>
Bredd	<b>26,2 mm</b>	Test standard	<b>EN 60598, EN 55015, EN 61000, EN 62741</b>
		Guidelines	<b>2014/35/EU, 2014/30/EU</b>
		Service life	<b>50.000 h</b>
		Energy efficiency class	<b>E</b>
		Colour temperature	<b>5.600 K</b>
		Colour rendering index CRI	<b>&gt; 80</b>
		Luminous flux	<b>1.000 lm</b>
		Färg	<b>grå (liknande RAL 7035)</b>

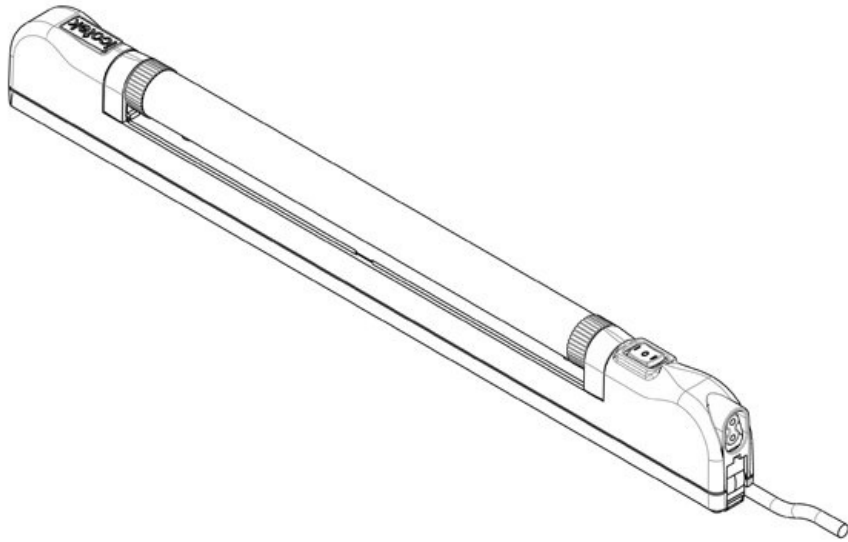


ArtNr.	<b>81104</b>	Length	<b>3.000 mm</b>
EAN	<b>4251269333</b>	connecting cable	
	<b>057</b>	Version	<b>Standard</b>
Antal	<b>1</b>	Connection possibilities	<b>Door operated switch</b>
UL-certifikat	-	Plugg typ	<b>Ferrules</b>
Längd	<b>448 mm</b>	Rated power	<b>8 W</b>
Höjd	<b>56,5 mm</b>	Operating voltage	<b>100 - 240 V AC, 50 - 60 Hz</b>
Bredd	<b>26,2 mm</b>	Test standard	<b>EN 60598, EN 55015, EN 61000, EN 62741</b>
		Guidelines	<b>2014/35/EU, 2014/30/EU</b>
		Service life	<b>50.000 h</b>
		Energy efficiency class	<b>E</b>
		Colour temperature	<b>5.600 K</b>
		Colour rendering index CRI	<b>&gt; 80</b>
		Luminous flux	<b>1.000 lm</b>
		Färg	<b>grå (liknande RAL 7035)</b>




Available from 03/2025

ArtNr.	<b>81200</b>	Length	<b>3.000 mm</b>
EAN		connecting	
Antal	<b>1</b>	cable	
UL-certifikat	<b>UL-US- 2442933-0 / UL-CA- 2432446-0</b>	Version	<b>Standard</b>
		Connection possibilities	<b>Door operated switch</b>
Längd	<b>448 mm</b>	Plugg typ	<b>Ferrules</b>
Höjd	<b>56,5 mm</b>	Rated power	<b>8 W</b>
Bredd	<b>26,2 mm</b>	Operating voltage	<b>100 - 240 V AC, 50 - 60 Hz</b>
		Test standard	<b>EN 60598, EN 55015, EN 61000, EN 62741</b>
		Guidelines	<b>2014/35/EU, 2014/30/EU</b>
		Service life	<b>50.000 h</b>
		Energy efficiency class	<b>E</b>
		Colour temperature	<b>5.600 K</b>
		Colour rendering index CRI	<b>&gt; 80</b>
		Luminous flux	<b>1.000 lm</b>
		Färg	<b>grå (liknande RAL 7035)</b>

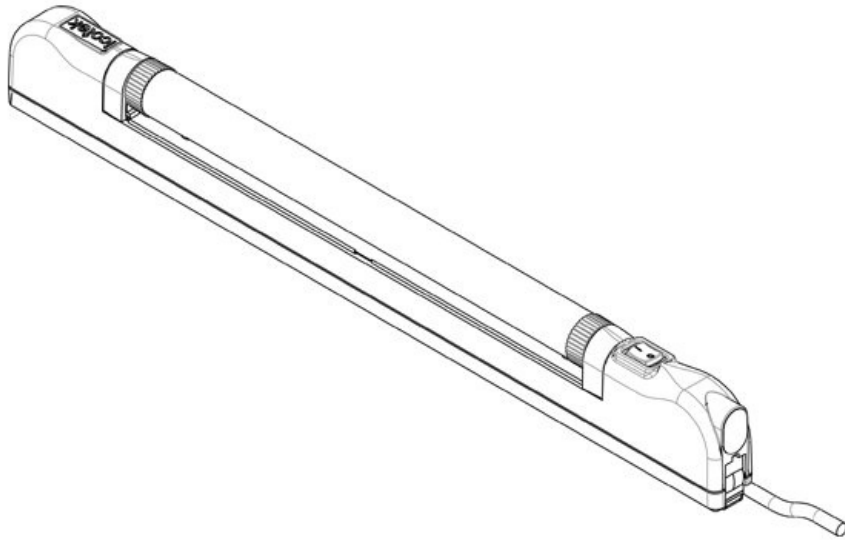

ArtNr.	<b>81105</b>	Length	<b>3.000 mm</b>
EAN	<b>4251269333</b>	connecting cable	
	<b>064</b>	Version	<b>PIR motion detector</b>
Antal	<b>1</b>	Plugg typ	<b>Ferrules</b>
UL-certifikat	-	Rated power	<b>8 W</b>
Längd	<b>448 mm</b>	Operating voltage	<b>100 - 240 V AC, 50 - 60 Hz</b>
Höjd	<b>56,5 mm</b>	Test standard	<b>EN 60598, EN 55015, EN 61000, EN 62741</b>
Bredd	<b>26,2 mm</b>	Guidelines	<b>2014/35/EU, 2014/30/EU</b>
		Service life	<b>50.000 h</b>
		Energy efficiency class	<b>E</b>
		Colour temperature	<b>5.600 K</b>
		Colour rendering index CRI	<b>&gt; 80</b>
		Luminous flux	<b>1.000 lm</b>
		Färg	<b>grå (liknande RAL 7035)</b>

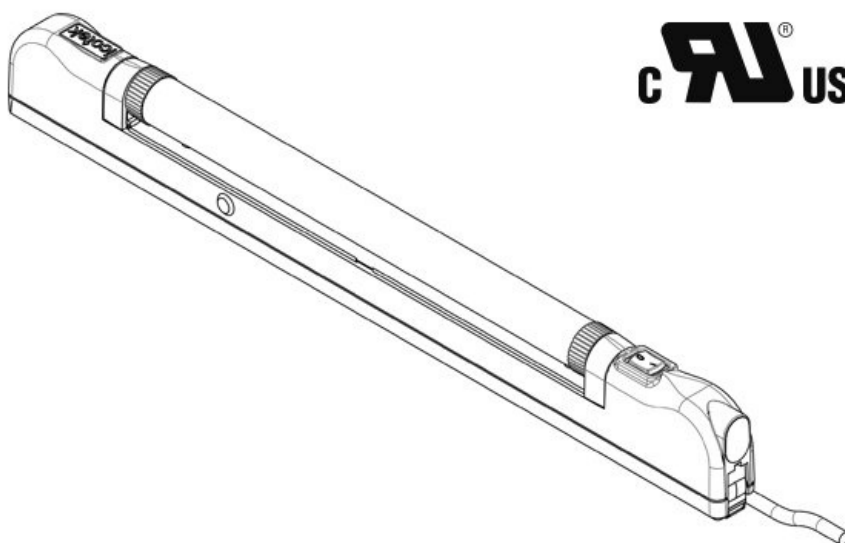

ArtNr.	<b>81201</b>	Length	<b>3.000 mm</b>
EAN		connecting cable	
Antal	<b>1</b>	Version	<b>PIR motion detector</b>
UL-certifikat	<b>UL-US-2442933-0 / UL-CA-2432446-0</b>	Plugg typ	<b>Ferrules</b>
		Rated power	<b>8 W</b>
Längd	<b>448 mm</b>	Operating voltage	<b>100 - 240 V AC, 50 - 60 Hz</b>
Höjd	<b>56,5 mm</b>	Test standard	<b>EN 60598, EN 55015, EN 61000, EN 62741</b>
Bredd	<b>26,2 mm</b>	Guidelines	<b>2014/35/EU, 2014/30/EU</b>
		Service life	<b>50.000 h</b>
		Energy efficiency class	<b>E</b>
		Colour temperature	<b>5.600 K</b>
		Colour rendering index CRI	<b>&gt; 80</b>
		Luminous flux	<b>1.000 lm</b>
		Färg	<b>grå (liknande RAL 7035)</b>



ArtNr. **81135** Antal skruvhål **4**  
EAN **4251269333** Skruvhålens **6,5 mm**  
**101** diameter  
Antal **1**  
Längd **484 mm**  
Höjd **6 mm**  
Bredd **44 mm**  
Färg **svart**



ArtNr. **81134** Antal skruvhål **4**  
EAN **4251269333** Skruvhålens **6,5 mm**  
**095** diameter  
Antal **1**  
Längd **484 mm**  
Höjd **6 mm**  
Bredd **44 mm**  
Färg **grå**  
**(liknande RAL 7035)**



**icotek**<sup>®</sup>  
smart cable management