



IP20



RoHS  
compliant



Made in  
Germany

## Specifikationer


IP-Klass (EN 60529)	IP20
Material	Polyamid
Brandklass	
Temperatur	-20 C° till 50 C°
Monteringstyp	Skruvmontering

## Fördelar

## Produkttyper och storlekar



ArtNr.	<b>81132</b>	Plugg typ	<b>C8 connector</b>
EAN	<b>4251269333071</b>	Rated current	<b>2,5 A</b>
		Färg	<b>svart</b>
Antal	<b>1</b>		
Längd	<b>85,2 mm</b>		
Höjd	<b>24 mm</b>		
Bredd	<b>63,2 mm</b>		
Length connecting cable	<b>600 mm</b>		

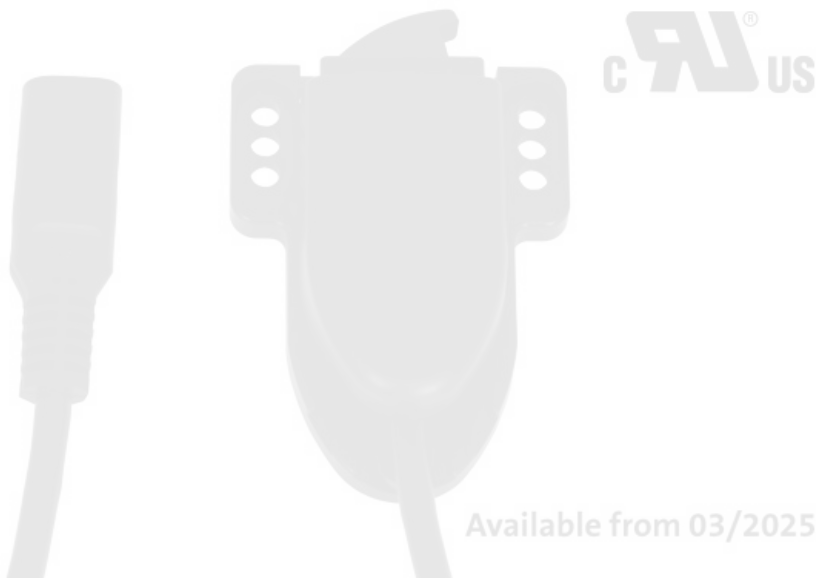

Available from 03/2025

ArtNr.	<b>81232</b>	Length	<b>600 mm</b>
EAN		connecting	
Antal	<b>1</b>	cable	
UL-certifikat	<b>UL-US-2442933-0 / UL-CA-2432446-0</b>	Plugg typ	<b>C8 connector</b>
		Operating voltage	<b>250 V AC, 25 W</b>
		Rated current	<b>2,5 A</b>
Längd	<b>85,2 mm</b>	Färg	<b>svart</b>
Höjd	<b>24 mm</b>		
Bredd	<b>63,2 mm</b>		



ArtNr.	<b>81334</b>	Plugg typ	<b>C8 connector, angled</b>
EAN	<b>4251269333002</b>		
Antal	<b>1</b>	Rated current	<b>2,5 A</b>
Längd	<b>85,2 mm</b>	Färg	<b>svart</b>
Höjd	<b>24 mm</b>		
Bredd	<b>63,2 mm</b>		
Length	<b>600 mm</b>		
connecting			
cable			

ArtNr.	<b>81133</b>	Plugg typ	<b>C8 connector</b>
EAN	<b>4251269333</b>	Rated current	<b>2,5 A</b>
	<b>088</b>	Färg	<b>svart</b>
Antal	<b>1</b>		
Längd	<b>85,2 mm</b>		
Höjd	<b>24 mm</b>		
Bredd	<b>63,2 mm</b>		
Length connecting cable	<b>1.500 mm</b>		



ArtNr.	<b>81233</b>	Length connecting cable	<b>1.500 mm</b>
EAN			
Antal	<b>1</b>		
UL-certifikat	<b>UL-US-2442933-0 / UL-CA-2432446-0</b>	Plugg typ	<b>C8 connector</b>
		Operating voltage	<b>250 V AC, 25 W</b>
		Rated current	<b>2,5 A</b>
Längd	<b>85,2 mm</b>	Färg	<b>svart</b>
Höjd	<b>24 mm</b>		
Bredd	<b>63,2 mm</b>		

Available from 03/2025



ArtNr.	<b>81333</b>	Plugg typ	<b>C8</b>
EAN	<b>4251269332</b>		<b>connector,</b>
	<b>999</b>		<b>angled</b>
Antal	<b>1</b>	Rated current	<b>2,5 A</b>
Längd	<b>85,2 mm</b>	Färg	<b>svart</b>
Höjd	<b>24 mm</b>		
Bredd	<b>63,2 mm</b>		
Length connecting cable	<b>1.500 mm</b>		

---

**icotek**<sup>®</sup>  
smart cable management