

KEL-BES-S


Split brush plate for cable pass-through




Screw mounting or mounting via expanding rivets possible.



Round version with M50 thread for locknut or snap-in mounting.

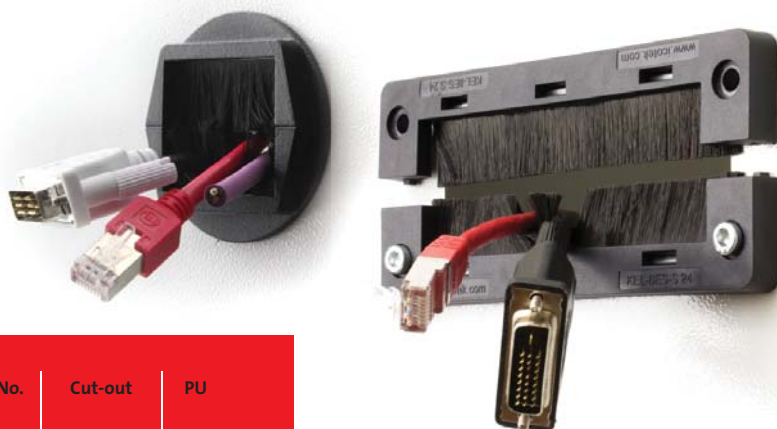

Description	Type	Order No.	Cut-out	PU
-------------	------	-----------	---------	----

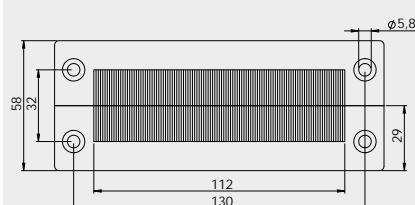


NEW

KEL-BES-S 24

51522

36 x 112 mm

10

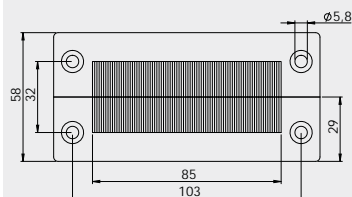


NEW

KEL-BES-S 16

51521

36 x 86 mm

10




NEW

KEL-BES-S 10

51520

36 x 65 mm

10




NEW

Expanding
rivets

99153

For wall
thickness
1-4 mm

100

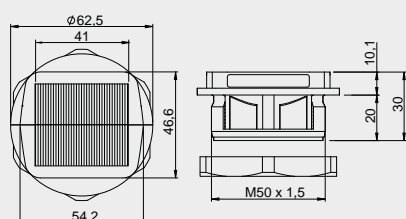

KEL-BES-S 50

51540

M50 x 1.5

10

Product description

Split brush plates KEL-BES-S for routing cables into server racks, control panels and electrical enclosures. The brush plates can either be mounted via screws or via expanding rivets. Due to the split frame the KEL-BES-S can also be subsequently installed around the routed cables. The KEL-BES-S frames match exactly the cut-out dimensions for 10-, 16- or 24-pin standard industrial connectors.

For round metric cut-outs M50 icotek offers the split KEL-BES-S 50. It can be either directly snapped into the cut-out or screwed with a locknut.

Advantages & benefits

- Fast and easy assembly (optional without screws)
- Subsequent assembly possible
- Versatile utilisation
- Thermal protection, separation of cold and warm air
- Allows reduced airflow while filtering out dust, hair and larger particulate matter
- Visual screening
- Protects cables against wear due to sharp edges of the cut-out

Specifications

Material	Frame, rectangular: Polyamide (PA) Frame, round: Polycarbonate (PC) (Flame class UL94-V0) Brushes: Polyamide (PA) Brush profile: sheet steel, zinc plated
Temperature Properties	- 20°C to + 90°C
Frame depth	Halogen-free, silicone-free 10 mm

Accessories

KEL-EMC-PF Cable collectors 123