

KEL-BES-S


Split brush plate for cable pass-through



Screw mounting or mounting via expanding rivets possible.



Round version with M50 thread for locknut or snap-in mounting.

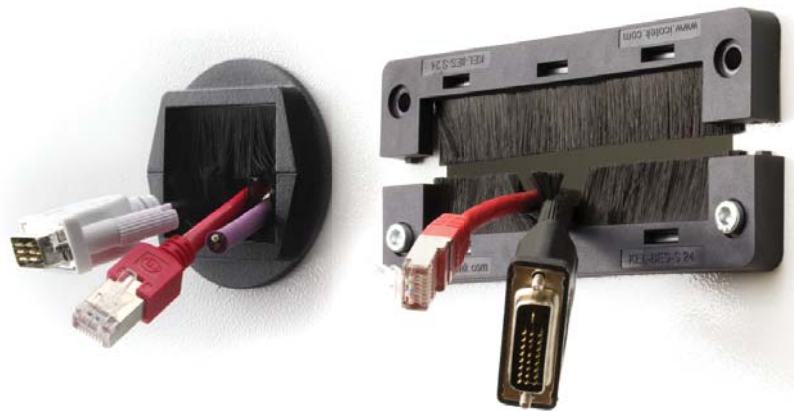

Description	Type	Order No.	Cut-out	PU
	KEL-BES-S 24 NEW KEL-BES-S 24 with expanding rivets	51522 51522.002	36 x 112 mm 36 x 112 mm	10 10
	KEL-BES-S 16 NEW KEL-BES-S 16 with expanding rivets	51521 51521.002	36 x 86 mm 36 x 86 mm	10 10
	KEL-BES-S 10 NEW KEL-BES-S 10 with expanding rivets	51520 51520.002	36 x 65 mm 36 x 65 mm	10 10
	Expanding rivets	99153	For wall thickness 1-4 mm	100
	KEL-BES-S 50	51540	M50 x 1.5 Snap-in function for wall thickness 1 - 2.5 mm	10
	KEL-BES-S 32	51538	M32 x 1.5 Snap-in function for wall thickness 1 - 2.5 mm	10

Product description

Split brush plates KEL-BES-S for routing cables into server racks, control panels and electrical enclosures. The brush plates can either be mounted via screws or via expanding rivets. Due to the split frame the KEL-BES-S can also be subsequently installed around the routed cables. The KEL-BES-S frames match exactly the cut-out dimensions for 10-, 16- or 24-pin standard industrial connectors.

For round metric cut-outs M32/M50 icotek offers the split KEL-BES-S 32/50. It can be either directly snapped into the cut-out or screwed with a locknut.

Advantages & benefits

- Fast and easy assembly (optional without screws)
- Subsequent assembly possible
- Versatile utilisation
- Allows reduced airflow while filtering out dust, hair and larger particulate matter
- Visual screening
- Protects cables against wear due to sharp edges of the cut-out

Specifications

Material	Frame, rectangular: Polyamide (PA) Frame, round: Polycarbonate (PC) (Flame class UL94-V0) Brushes: Polyamide (PA) Brush profile: sheet steel, zinc plated
Temperature Properties	- 20°C to + 90°C
Frame depth	10 mm
	Halogen-free, silicone-free

Accessories

KEL-EMC-PF Cable collectors 139