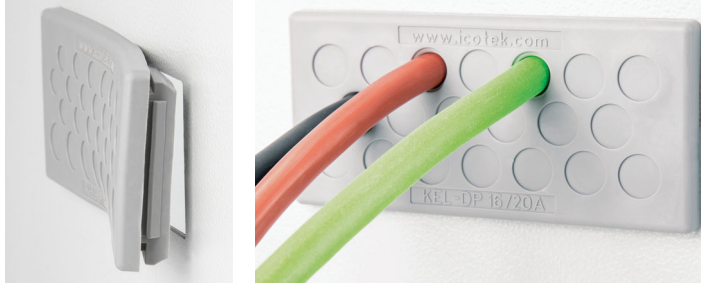


KEL-DP 16







Cable entry plates



NEW



IP64

Description	Type	Order No.	Number of cables	PU
	KEL-DP 16 10	43460	10 x max. 12.1mm	10
	KEL-DP 16 11	43461	3 x max. 10.5 mm 8 x max. 12.6 mm	10
	KEL-DP 16 20	43462	20 x max. 8.3 mm	10
	KEL-DP 16 22	43463	5 x max. 12.1 mm 4 x max. 8.3 mm 13 x max. 6.5 mm	10
	KEL-DP 16 23	43464	18 x max. 6.5 mm 5 x max. 12.1 mm	10
	KEL-DP 16 26	43465	19 x max. 6.5 mm 7 x max. 8.3 mm	10

Product description

KEL-DP entry plates are designed for routing cables without connectors. The KEL-DP products are a cost saving alternative to traditional cable glands. Simply make a small hole in the thin membrane and push the cables through. The KEL-DP 24 provides protection IP64 / UL Type 12.

A special rib ensures a centred fit in the cut-outs. ST-B Plugs can be used for sealing pierced membranes if cables have been removed.

Advantages & benefits

- Fast and easy assembly, no tools required
- Very good strain relief on the cable bundle
- High cable density
- Cost-effective
- Hygienic design – free of dirt-collecting recesses
- For wall thickness 1.5 – 2.5 mm

Specifications

Material	Elastomer
Flame class	UL94-Vo, self-extinguishing
IP rating	IP64 (certified acc. to EN 60529)
UL type rating	UL type 12 (acc. to UL 50E)
Temperature	- 40°C to + 100°C (static)
Properties	Halogen-free, silicone-free
Cut-out dimensions	36 × 86 mm
Plate depth	5 mm
	For wall thickness 1.5 – 2.5 mm

Accessories

ST-B Plugs	93
FP Flanged plates	194 - 203