



IP66

UL TYPE 12

UL TYPE 4X

HL3 EN 45545-2

E45 EI30 EN 45545-3

UV ISO 4892-2A

ECOLAB certified

RoHS compliant

Made in Germany



KEL-ER 10 Cable entry frames



V2A anti-corrosive


Also available with stainless steel screws (V2A).



Also available with threaded bushings.



Split KT grommets

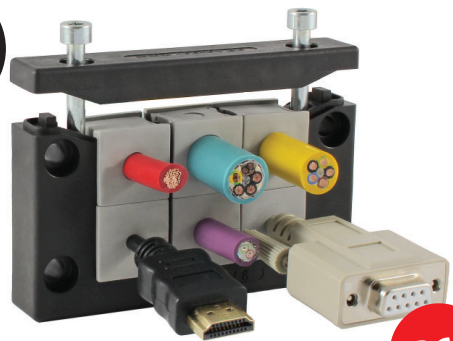

IP66

1.11

Description	Type	Order No.	Grommets small large	PU
	KEL-ER 10 6	48216	6 -	10
	KEL-ER 10 6 with V2A screws	48216.200	6 -	10
	KEL-ER 10 3	48212	2 1	10
	KEL-ER 10 3 with V2A screws	48212.200	2 1	10

Product description

Split cable entry system for routing and sealing cables with connectors, providing an IP66 / up to UL type 4X rating and strain relief for cable diameters from 1 to 16 mm (KT 1 - 15) and 16 to 35 mm (KT 16 - 34).

The new cable entry system is easy to install. Cable grommets are placed into compartments and are securely fixed to the frame during assembly. The KEL-ER 10 is the same size as a standard 10 pin industrial connector. All frame systems come with a rubber gasket.

Advantages & benefits

- Maintain manufacturer's warranty on pre-terminated cables
- Retrofits, repairs and maintenance can be done much more easily and quickly
- High cable density, wide variety of grommets
- Strain relief according to EN 62444
- High stability, vibration resistant

Specifications

Material	Polyamide (PA)
Flame class	UL94-Vo, self-extinguishing
IP rating	IP66, with gasket and correct selection of single grommets (certified acc. to EN 60529)
UL type rating	UL type 4X (acc. to UL 50E)
Temperature	- 40°C to + 140°C (static)
Properties	Halogen-free, silicone-free
Cut-out dimensions	36 / 46 × 65 mm / Page 220-221
Frame depth	17 mm

Accessories

KT Cable grommets	48 - 52
AT Adapter grommets	54 - 57
KEL-EMC Cable collectors	148 - 150
ST Plugs	53