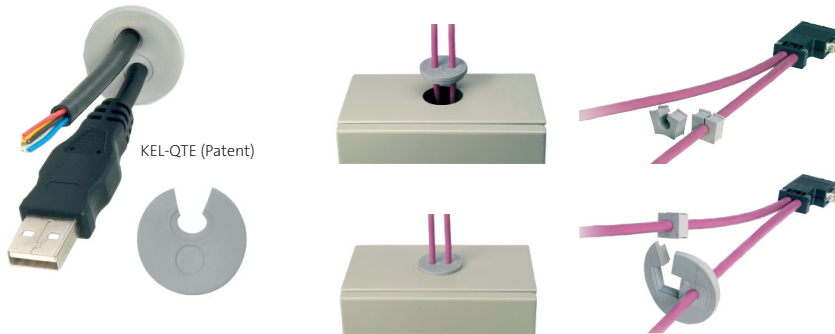


KEL-QTA | KEL-QTE

Split cable entry plates


1.23

Description	Type	Order No. Type A	Order No. Type B	Cut-out [mm]	Cables		PU
					pre-terminated	non-pre-term.	
	KEL-QTA 32	43632	43636	∅ 32	1 × 1 - 15 mm	-	10
	KEL-QTA 50	43622	43626	∅ 50	2 × 1 - 15 mm	-	10
	KEL-QTE 20 2.5	43412	-	∅ 20	1 × 2.6 - 3.2 mm	1 × max. 5.2 mm	10
	KEL-QTE 20 3	43413	-	∅ 20	1 × 3.1 - 3.8 mm	1 × max. 5.2 mm	10
	KEL-QTE 20 4	43414	-	∅ 20	1 × 3.8 - 4.8 mm	1 × max. 5.2 mm	10
	KEL-QTE 20 5	43415	-	∅ 20	1 × 4.7 - 5.6 mm	1 × max. 5.2 mm	10

Product description

The KEL-QTA easily routes pre-terminated cables, multi-conductors, hoses or conduits without using any tools for assembly.

Advantages & benefits

- Fast and easy assembly without tools
- Increased cable density by using multi-position grommets
- Simple assembly and disassembly in case of change or service
- Routing of cables with and without connectors in a high density

Specifications

Material	Elastomer
Flame class	UL94-Vo, self-extinguishing
IP rating (QTA)	IP54, with correct selection of the cable grommets (QT single)
Temperature	- 40°C to + 100°C (static)
Properties	Halogen-free, silicone-free
Cut-out dimension	Metric sizes

Type A:	For wall thickness 1.5 - 2.5 mm
Type B:	For wall thickness 2.8 - 4 mm

Accessories

QT Cable grommets	70
ST Plugs	53