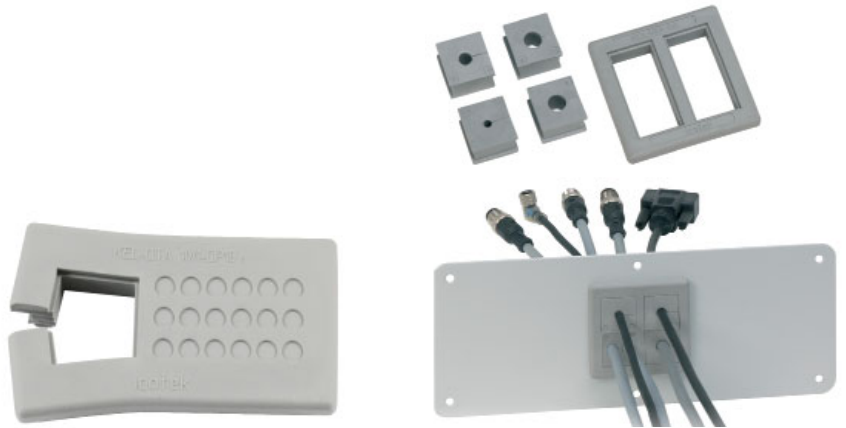


KEL-QTA

Split cable entry plates



1.23

Product description

The KEL-QTA easily routes pre-terminated cables, multi-conductors, hoses or conduits without using any tools for assembly.

Advantages & benefits

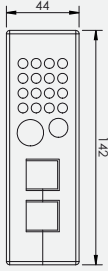
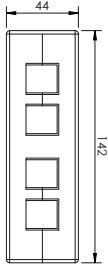



- Quick assembly without tools
- High cable density by using multi-position grommets
- Simple assembly and disassembly in case of change or service
- Routing of cables with and without connectors in a high density
- Suitable for standard industrial connector cut-outs

Specifications

Material Elastomer
Flame class UL94-Vo, self-extinguishing
IP rating IP54, with correct selection of the cable grommets QT
Temperature - 40°C to + 100°C (static)
Properties Halogen-free, silicone-free
Type A: For wall thickness 1.5 - 2.5 mm
Type B: For wall thickness 2.8 - 4 mm

Accessories

QT Cable grommets 70
 ST-B Plugs 93
 FP Flange plates 194 - 203

Description	Type	Order No. Type A	Order No. Type B	Cut-out [mm]	Cables	PU
	KEL-QTA 24 2 -DP 18	43642	43643	112 × 36	pre-terminated 2 × 1 - 15 mm without connector 16 × max. 7 mm 1 × max. 12 mm 1 × max. 16 mm	10
	KEL-QTA 24 4	43644	43645	112 × 36	pre-terminated 4 × 1 - 15 mm	10
	KEL-QTA 10 1 -DP 18	43655	43658	65 × 36	pre-terminated 1 × 1 - 15 mm without connector 18 × max. 5 mm	10
	KEL-QTA 10 2 -DP 6	43656	43659	65 × 36	pre-terminated 2 × 1 - 15 mm without connector 6 × max. 5 mm	10
	KEL-QTA-B4	43660	-	46 × 46	pre-terminated 4 × 1 - 15 mm	10