


# KT-DPF | KT-SC | KTMB

## Grommets, multi-range

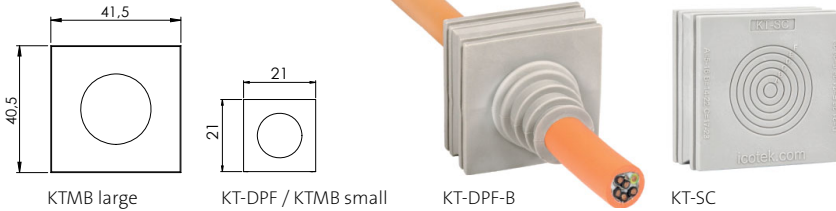

1.1

Description	Type	Order No.	Size KT	Clamping range	PU
KT-DPF-A	KT-DPF-A <span style="color: grey;">■</span> 41260 <span style="color: black;">■</span> 41360		KT small	3 - 12 mm	10
KT-DPF-B	KT-DPF-B <span style="color: grey;">■</span> 41261 <span style="color: black;">■</span> 41361		KT large	4 - 18 mm	10
KT-DPF-C	KT-DPF-C <span style="color: grey;">■</span> 41262 <span style="color: black;">■</span> 41362		KT large	14 - 26 mm	10
KT-SC	<span style="color: red;">NEW</span> KT-SC	41485	KT large	5 - 28 mm	10
KTMB-A	KTMB-A	41432	KT small	2.5 - 6.5 mm	10
KTMB-B	KTMB-B	41434	KT small	4 - 7.5 mm	10
KTMB-C	KTMB-C	41436	KT small	6.5 - 10 mm	10
KTMB-D	KTMB-D	41438	KT small	9.5 - 13 mm	10
KTMB-E	KTMB-E	41440	KT small	13 - 16 mm	10
Cross section KTMB					
KTMB-G	KTMB-G	41460	KT large	13 - 18 mm	10
KTMB-H	KTMB-H	41465	KT large	18 - 23 mm	10
KTMB-I	KTMB-I	41470	KT large	23 - 28 mm	10
KTMB-J	KTMB-J	41475	KT large	28 - 33 mm	10
KTMB-K	KTMB-K	41480	KT large	2x 13 - 18 mm	10

## Product description

The KT-DPF/KTMB grommets accept a wide range of cable diameters. This is a great benefit when the exact cable diameter is not known in advance. The KT-DPF/KTMB grommets are not split and therefore only usable for cables without connectors. Cutting of KT-DPF grommets: Cable diameter less 20%.

The KT-SC grommet is based on the large KT grommet and enables flexible routing and sealing of electrical cables and pneumatic hoses with diameters from 5 – 28 mm.

## Specifications grey


Material	Elastomer
Flame class	UL94-Vo, self-extinguishing
IP rating	IP54
UL type rating	UL type 12 (acc. to UL 50E)
Temperature	- 40°C to + 100°C (static)
Properties	Halogen-free, silicone-free

## Specifications black

Material	Elastomer
Flame class	UL94-HB
IP rating	IP54
Temperature	- 30°C to + 90°C (static)
Properties	Higher chemical resistance

## KMS Cable template

Page 47  
Order No. 39800



\*Only valid for grey product types