

KEL-DP multi-membrane cable entry plates

pluggable, with high cable density / IP64 / UL Type 12

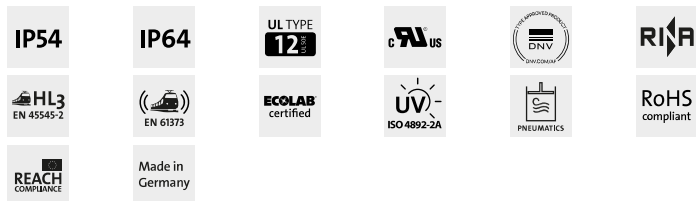


KEL-DP entry plates are designed for routing cables without connectors, hoses or fibre optics in limited space.

The KEL-DP products are an easy to assemble and cost saving alternative to traditional cable glands. Simply make a small hole in the thin membrane and push the cables through. The KEL-DP provides protection IP64 / UL type 12.

The KEL-DP matches exactly the cut-out dimensions of 6-, 10-, 16- and 24-pin standard industrial connectors. The very compact size KEL-DP-E is designed for routing cables in very small space. Through a cut-out of only 18 x 112 mm, up to 21 cables can be easily routed and sealed. A special rib ensures a centred fit in the cut-outs.

[ST-B Plugs](#) can be used for sealing pierced membranes if cables have been removed.



Specifications


| | |
|------------------------------|-----------------------------|
| IP rating (EN 60529) | IP54, IP64 |
| UL Type (UL 50E) | UL Type 12 |
| Material | Elastomer |
| Flame class | UL94-V0, self-extinguishing |
| Operating temperature | -30 C° to 100 C° |
| Properties | halogen free, silicone free |
| Mounting options | Snap-in |

Advantages & benefits

- Quick assembly without tools
- High cable density
- Cost-effective solution
- Hygienic design - free of dirt-collecting recesses


Product types & sizes

KEL-DP 24|12 B gy




| | | | |
|------------------------|--------------------------------|-------------------------|-----------------------|
| Part No. | 43510 | Width | 44 mm |
| EAN | 4251269334627 | Height | 12 |
| Package quantity | 10 | Mounting height | 5 mm |
| For max. no. of cables | 12 | Cut-out size | 112 x 36 mm |
| Max. cable diameter | 15 mm | For min. wall thickness | 2,8 mm |
| Colour | grey (similar RAL 7035) | For max. wall thickness | 4 mm |
| Length | 142 mm | Clamping range | 12 x 1 - 15 mm |


KEL-DP 24|12 A gy




| | | | |
|------------------------|--------------------------------|-------------------------|-----------------------|
| Part No. | 43508 | Width | 44 mm |
| EAN | 4251269309830 | Height | 12 |
| Package quantity | 10 | Mounting height | 5 mm |
| For max. no. of cables | 12 | Cut-out size | 112 x 36 mm |
| Max. cable diameter | 15 mm | For min. wall thickness | 1,5 mm |
| Colour | grey (similar RAL 7035) | For max. wall thickness | 2,5 mm |
| Length | 142 mm | For wall thickness | 1,5 - 2,5 mm |
| | | Clamping range | 12 x 1 - 15 mm |

KEL-DP 24|12 A bk


| | | | |
|------------------------|----------------------|-------------------------|-----------------------|
| Part No. | 50508 | Width | 44 mm |
| EAN | 4251269314612 | Height | 12 |
| Package quantity | 10 | Mounting height | 5 mm |
| For max. no. of cables | 12 | Cut-out size | 112 × 36 mm |
| Max. cable diameter | 15 mm | For min. wall thickness | 1,5 mm |
| Colour | black | For max. wall thickness | 2,5 mm |
| Length | 142 mm | For wall thickness | 1,5 - 2,5 mm |
| | | Clamping range | 12 x 1 - 15 mm |

KEL-DP 24|14 A gy


| | | | |
|------------------------|--------------------------------|-------------------------|-------------------------|
| Part No. | 43512 | Width | 44 mm |
| EAN | 4251269309854 | Height | 12 |
| Package quantity | 10 | Mounting height | 5 mm |
| For max. no. of cables | 14 | Cut-out size | 112 × 36 mm |
| Max. cable diameter | 12,1 mm | For min. wall thickness | 1,5 mm |
| Colour | grey (similar RAL 7035) | For max. wall thickness | 2,5 mm |
| Length | 142 mm | For wall thickness | 1,5 - 2,5 mm |
| | | Clamping range | 14 x 1 - 12.1 mm |

KEL-DP 24|14 B gy


| | | | |
|------------------------|--------------------------------|-------------------------|-------------------------|
| Part No. | 43522 | Width | 44 mm |
| EAN | 4251269309939 | Height | 12 |
| Package quantity | 10 | Mounting height | 5 mm |
| For max. no. of cables | 14 | Cut-out size | 112 × 36 mm |
| Max. cable diameter | 12,1 mm | For min. wall thickness | 2,8 mm |
| Colour | grey (similar RAL 7035) | For max. wall thickness | 4 mm |
| Length | 142 mm | Clamping range | 14 x 1 - 12.1 mm |

KEL-DP 24|14 A bk


| | | | |
|------------------------|----------------------|-------------------------|-------------------------|
| Part No. | 50512 | Width | 44 mm |
| EAN | 4251269314636 | Height | 12 |
| Package quantity | 10 | Mounting height | 5 mm |
| For max. no. of cables | 14 | Cut-out size | 112 × 36 mm |
| Max. cable diameter | 12,1 mm | For min. wall thickness | 1,5 mm |
| Colour | black | For max. wall thickness | 2,5 mm |
| Length | 142 mm | For wall thickness | 1,5 - 2,5 mm |
| | | Clamping range | 14 x 1 - 12.1 mm |

KEL-DP 24|14 B bk


| | | | |
|------------------------|----------------------|-------------------------|-------------------------|
| Part No. | 50522 | Width | 44 mm |
| EAN | 4251269314711 | Height | 12 |
| Package quantity | 10 | Mounting height | 5 mm |
| For max. no. of cables | 14 | Cut-out size | 112 × 36 mm |
| Max. cable diameter | 12,1 mm | For min. wall thickness | 2,8 mm |
| Colour | black | For max. wall thickness | 4 mm |
| Length | 142 mm | Clamping range | 14 x 1 - 12.1 mm |

KEL-DP 24|17 A gy


| | | | |
|------------------------|--------------------------------|-------------------------|---|
| Part No. | 43514 | Width | 44 mm |
| EAN | 4251269309861 | Height | 12 |
| Package quantity | 10 | Mounting height | 5 mm |
| For max. no. of cables | 17 | Cut-out size | 112 × 36 mm |
| Max. cable diameter | 12,6 mm | For min. wall thickness | 1,5 mm |
| Colour | grey (similar RAL 7035) | For max. wall thickness | 2,5 mm |
| Length | 142 mm | For wall thickness | 1,5 - 2,5 mm |
| | | Clamping range | 5 x 1 - 10.5 mm 12 x 1 - 12.6 mm |

KEL-DP 24|17 B gy


| | | | |
|------------------------|--------------------------------|-------------------------|---|
| Part No. | 43523 | Width | 44 mm |
| EAN | 4251269309946 | Height | 12 |
| Package quantity | 10 | Mounting height | 5 mm |
| For max. no. of cables | 17 | Cut-out size | 112 × 36 mm |
| Max. cable diameter | 12,6 mm | For min. wall thickness | 2,8 mm |
| Colour | grey (similar RAL 7035) | For max. wall thickness | 4 mm |
| Length | 142 mm | Clamping range | 5 x 1 - 10.5 mm 12 x 1 - 12.6 mm |

KEL-DP 24|17 A bk


| | | | |
|------------------------|----------------------|-------------------------|---|
| Part No. | 50514 | Width | 44 mm |
| EAN | 4251269314643 | Height | 12 |
| Package quantity | 10 | Mounting height | 5 mm |
| For max. no. of cables | 17 | Cut-out size | 112 × 36 mm |
| Max. cable diameter | 12,6 mm | For min. wall thickness | 1,5 mm |
| Colour | black | For max. wall thickness | 2,5 mm |
| Length | 142 mm | For wall thickness | 1,5 - 2,5 mm |
| | | Clamping range | 5 x 1 - 10.5 mm 12 x 1 - 12.6 mm |

KEL-DP 24|17 B bk


| | | | |
|------------------------|----------------------|-------------------------|---|
| Part No. | 50523 | Width | 44 mm |
| EAN | 4251269314728 | Height | 12 |
| Package quantity | 10 | Mounting height | 5 mm |
| For max. no. of cables | 17 | Cut-out size | 112 × 36 mm |
| Max. cable diameter | 12,6 mm | For min. wall thickness | 2,8 mm |
| Colour | black | For max. wall thickness | 4 mm |
| Length | 142 mm | Clamping range | 5 x 1 - 10.5 mm 12 x 1 - 12.6 mm |

KEL-DP 24|18 A gy


| | | | |
|------------------------|--------------------------------|-------------------------|---|
| Part No. | 43515 | Width | 44 mm |
| EAN | 4251269309878 | Height | 12 |
| Package quantity | 10 | Mounting height | 5 mm |
| For max. no. of cables | 18 | Cut-out size | 112 × 36 mm |
| Max. cable diameter | 16,1 mm | For min. wall thickness | 1,5 mm |
| Colour | grey (similar RAL 7035) | For max. wall thickness | 2,5 mm |
| Length | 142 mm | For wall thickness | 1,5 - 2,5 mm |
| | | Clamping range | 4 x 1 - 6.5 mm 5 x 1 - 10.5 mm 5 x 1 - 12.6 mm 4 x 1 - 16.1 mm |

KEL-DP 24|18 B gy


| | | | |
|------------------------|--------------------------------|-------------------------|---|
| Part No. | 43528 | Width | 44 mm |
| EAN | 4251269309991 | Height | 12 |
| Package quantity | 10 | Mounting height | 5 mm |
| For max. no. of cables | 18 | Cut-out size | 112 × 36 mm |
| Max. cable diameter | 16,1 mm | For min. wall thickness | 2,8 mm |
| Colour | grey (similar RAL 7035) | For max. wall thickness | 4 mm |
| Length | 142 mm | Clamping range | 4 x 1 - 6.5 mm 5 x 1 - 10.5 mm 5 x 1 - 12.6 mm 4 x 1 - 16.1 mm |

KEL-DP 24|18 A bk


| | | | |
|------------------------|----------------------|-------------------------|---|
| Part No. | 50515 | Width | 44 mm |
| EAN | 4251269314650 | Height | 12 |
| Package quantity | 10 | Mounting height | 5 mm |
| For max. no. of cables | 18 | Cut-out size | 112 x 36 mm |
| Max. cable diameter | 16,1 mm | For min. wall thickness | 1,5 mm |
| Colour | black | For max. wall thickness | 2,5 mm |
| Length | 142 mm | For wall thickness | 1,5 - 2,5 mm |
| | | Clamping range | 4 x 1 - 6.5 mm 5 x 1 - 10.5 mm 5 x 1 - 12.6 mm 4 x 1 - 16.1 mm |

KEL-DP 24|18 B bk


| | | | |
|------------------------|----------------------|-------------------------|---|
| Part No. | 50528 | Width | 44 mm |
| EAN | 4251269314773 | Height | 12 |
| Package quantity | 10 | Mounting height | 5 mm |
| For max. no. of cables | 18 | Cut-out size | 112 x 36 mm |
| Max. cable diameter | 16,1 mm | For min. wall thickness | 2,8 mm |
| Colour | black | For max. wall thickness | 4 mm |
| Length | 142 mm | Clamping range | 4 x 1 - 6.5 mm 5 x 1 - 10.5 mm 5 x 1 - 12.6 mm 4 x 1 - 16.1 mm |

KEL-DP 24|19 A gy


| | | | |
|------------------------|--------------------------------|-------------------------|--|
| Part No. | 43516 | Width | 44 mm |
| EAN | 4251269309885 | Height | 12 |
| Package quantity | 10 | Mounting height | 5 mm |
| For max. no. of cables | 19 | Cut-out size | 112 x 36 mm |
| Max. cable diameter | 12,1 mm | For min. wall thickness | 1,5 mm |
| Colour | grey (similar RAL 7035) | For max. wall thickness | 2,5 mm |
| Length | 142 mm | For wall thickness | 1,5 - 2,5 mm |
| | | Clamping range | 12 x 1 - 6.5 mm 7 x 1 - 12.1 mm |

KEL-DP 24|19 B gy


| | | | |
|------------------------|--------------------------------|-------------------------|--|
| Part No. | 43524 | Width | 44 mm |
| EAN | 4251269309953 | Height | 12 |
| Package quantity | 10 | Mounting height | 5 mm |
| For max. no. of cables | 19 | Cut-out size | 112 x 36 mm |
| Max. cable diameter | 12,1 mm | For min. wall thickness | 2,8 mm |
| Colour | grey (similar RAL 7035) | For max. wall thickness | 4 mm |
| Length | 142 mm | Clamping range | 12 x 1 - 6.5 mm 7 x 1 - 12.1 mm |

KEL-DP 24|19 A bk


| | | | |
|------------------------|----------------------|-------------------------|--|
| Part No. | 50516 | Width | 44 mm |
| EAN | 4251269314667 | Height | 12 |
| Package quantity | 10 | Mounting height | 5 mm |
| For max. no. of cables | 19 | Cut-out size | 112 x 36 mm |
| Max. cable diameter | 12,1 mm | For min. wall thickness | 1,5 mm |
| Colour | black | For max. wall thickness | 2,5 mm |
| Length | 142 mm | For wall thickness | 1,5 - 2,5 mm |
| | | Clamping range | 12 x 1 - 6.5 mm 7 x 1 - 12.1 mm |

KEL-DP 24|19 B bk

| | | | |
|------------------------|----------------------|-------------------------|--|
| Part No. | 50524 | Width | 44 mm |
| EAN | 4251269314735 | Height | 12 |
| Package quantity | 10 | Mounting height | 5 mm |
| For max. no. of cables | 19 | Cut-out size | 112 × 36 mm |
| Max. cable diameter | 12,1 mm | For min. wall thickness | 2,8 mm |
| Colour | black | For max. wall thickness | 4 mm |
| Length | 142 mm | Clamping range | 12 x 1 - 6.5 mm 7 x 1 - 12.1 mm |

KEL-DP 24|26 A gy


| | | | |
|------------------------|--------------------------------|-------------------------|--|
| Part No. | 43518 | Width | 44 mm |
| EAN | 4251269309892 | Height | 12 |
| Package quantity | 10 | Mounting height | 5 mm |
| For max. no. of cables | 26 | Cut-out size | 112 × 36 mm |
| Max. cable diameter | 16,1 mm | For min. wall thickness | 1,5 mm |
| Colour | grey (similar RAL 7035) | For max. wall thickness | 2,5 mm |
| Length | 142 mm | For wall thickness | 1,5 - 2,5 mm |
| | | Clamping range | 16 x 1 - 6.5 mm 4 x 1 - 12.1 mm 4 x 1 - 16.1 mm |

KEL-DP 24|26 B gy


| | | | |
|------------------------|--------------------------------|-------------------------|--|
| Part No. | 43525 | Width | 44 mm |
| EAN | 4251269309960 | Height | 12 |
| Package quantity | 10 | Mounting height | 5 mm |
| For max. no. of cables | 26 | Cut-out size | 112 × 36 mm |
| Max. cable diameter | 16,1 mm | For min. wall thickness | 2,8 mm |
| Colour | grey (similar RAL 7035) | For max. wall thickness | 4 mm |
| Length | 142 mm | Clamping range | 16 x 1 - 6.5 mm 4 x 1 - 12.1 mm 4 x 1 - 16.1 mm |

KEL-DP 24|26 A bk


| | | | |
|------------------------|----------------------|-------------------------|--|
| Part No. | 50518 | Width | 44 mm |
| EAN | 4251269314674 | Height | 12 |
| Package quantity | 10 | Mounting height | 5 mm |
| For max. no. of cables | 26 | Cut-out size | 112 × 36 mm |
| Max. cable diameter | 16,1 mm | For min. wall thickness | 1,5 mm |
| Colour | black | For max. wall thickness | 2,5 mm |
| Length | 142 mm | For wall thickness | 1,5 - 2,5 mm |
| | | Clamping range | 16 x 1 - 6.5 mm 4 x 1 - 12.1 mm 4 x 1 - 16.1 mm |

KEL-DP 24|26 B bk


| | | | |
|------------------------|----------------------|-------------------------|--|
| Part No. | 50525 | Width | 44 mm |
| EAN | 4251269314742 | Height | 12 |
| Package quantity | 10 | Mounting height | 5 mm |
| For max. no. of cables | 26 | Cut-out size | 112 × 36 mm |
| Max. cable diameter | 16,1 mm | For min. wall thickness | 2,8 mm |
| Colour | black | For max. wall thickness | 4 mm |
| Length | 142 mm | Clamping range | 16 x 1 - 6.5 mm 4 x 1 - 12.1 mm 4 x 1 - 16.1 mm |

KEL-DP 24|42 A gy


| | | | |
|------------------------|--------------------------------|-------------------------|------------------------|
| Part No. | 43511 | Width | 44 mm |
| EAN | 4251269309847 | Height | 12 |
| Package quantity | 10 | Mounting height | 5 mm |
| For max. no. of cables | 42 | Cut-out size | 112 x 36 mm |
| Max. cable diameter | 4,7 mm | For min. wall thickness | 1,5 mm |
| Colour | grey (similar RAL 7035) | For max. wall thickness | 2,5 mm |
| Length | 142 mm | For wall thickness | 1,5 - 2,5 mm |
| | | Clamping range | 12 x 1 - 7.2 mm |
| | | | 17 x 1 - 6.4 mm |
| | | | 12 x 1 - 5 mm |
| | | | 1 x 1 - 4.7 mm |

KEL-DP 24|42 B gy


| | | | |
|------------------------|--------------------------------|-------------------------|------------------------|
| Part No. | 43521 | Width | 44 mm |
| EAN | 4251269309922 | Height | 12 |
| Package quantity | 10 | Mounting height | 5 mm |
| For max. no. of cables | 42 | Cut-out size | 112 x 36 mm |
| Max. cable diameter | 4,7 mm | For min. wall thickness | 2,8 mm |
| Colour | grey (similar RAL 7035) | For max. wall thickness | 4 mm |
| Length | 142 mm | Clamping range | 12 x 1 - 7.2 mm |
| | | | 17 x 1 - 6.4 mm |
| | | | 12 x 1 - 5 mm |
| | | | 1 x 1 - 4.7 mm |

KEL-DP 24|42 A bk

| | | | |
|------------------------|----------------------|-------------------------|------------------------|
| Part No. | 50511 | Width | 44 mm |
| EAN | 4251269314629 | Height | 12 |
| Package quantity | 10 | Mounting height | 5 mm |
| For max. no. of cables | 42 | Cut-out size | 112 x 36 mm |
| Max. cable diameter | 4,7 mm | For min. wall thickness | 1,5 mm |
| Colour | black | For max. wall thickness | 2,5 mm |
| Length | 142 mm | For wall thickness | 1,5 - 2,5 mm |
| | | Clamping range | 12 x 1 - 7.2 mm |
| | | | 17 x 1 - 6.4 mm |
| | | | 12 x 1 - 5 mm |
| | | | 1 x 1 - 4.7 mm |

KEL-DP 24|42 B bk

| | | | |
|------------------------|----------------------|-------------------------|------------------------|
| Part No. | 50521 | Width | 44 mm |
| EAN | 4251269314704 | Height | 12 |
| Package quantity | 10 | Mounting height | 5 mm |
| For max. no. of cables | 42 | Cut-out size | 112 x 36 mm |
| Max. cable diameter | 4,7 mm | For min. wall thickness | 2,8 mm |
| Colour | black | For max. wall thickness | 4 mm |
| Length | 142 mm | Clamping range | 12 x 1 - 7.2 mm |
| | | | 17 x 1 - 6.4 mm |
| | | | 12 x 1 - 5 mm |
| | | | 1 x 1 - 4.7 mm |

KEL-DP 24|48 A gy

| | | | |
|------------------------|--------------------------------|-------------------------|------------------------|
| Part No. | 43519 | Width | 44 mm |
| EAN | 4251269309908 | Height | 12 |
| Package quantity | 10 | Mounting height | 5 mm |
| For max. no. of cables | 48 | Cut-out size | 112 x 36 mm |
| Max. cable diameter | 6,5 mm | For min. wall thickness | 1,5 mm |
| Colour | grey (similar RAL 7035) | For max. wall thickness | 2,5 mm |
| Length | 142 mm | For wall thickness | 1,5 - 2,5 mm |
| | | Clamping range | 48 x 1 - 6.5 mm |

KEL-DP 24|48 B gy


| | | | |
|------------------------|--------------------------------|-------------------------|------------------------|
| Part No. | 43526 | Width | 44 mm |
| EAN | 4251269309977 | Height | 12 |
| Package quantity | 10 | Mounting height | 5 mm |
| For max. no. of cables | 48 | Cut-out size | 112 × 36 mm |
| Max. cable diameter | 6,5 mm | For min. wall thickness | 2,8 mm |
| Colour | grey (similar RAL 7035) | For max. wall thickness | 4 mm |
| Length | 142 mm | Clamping range | 48 x 1 - 6.5 mm |

KEL-DP 24|48 A bk


| | | | |
|------------------------|----------------------|-------------------------|------------------------|
| Part No. | 50519 | Width | 44 mm |
| EAN | 4251269314681 | Height | 12 |
| Package quantity | 10 | Mounting height | 5 mm |
| For max. no. of cables | 48 | Cut-out size | 112 × 36 mm |
| Max. cable diameter | 6,5 mm | For min. wall thickness | 1,5 mm |
| Colour | black | For max. wall thickness | 2,5 mm |
| Length | 142 mm | For wall thickness | 1,5 - 2,5 mm |
| | | Clamping range | 48 x 1 - 6.5 mm |

KEL-DP 24|48 B bk


| | | | |
|------------------------|----------------------|-------------------------|------------------------|
| Part No. | 50526 | Width | 44 mm |
| EAN | 4251269314759 | Height | 12 |
| Package quantity | 10 | Mounting height | 5 mm |
| For max. no. of cables | 48 | Cut-out size | 112 × 36 mm |
| Max. cable diameter | 6,5 mm | For min. wall thickness | 2,8 mm |
| Colour | black | For max. wall thickness | 4 mm |
| Length | 142 mm | Clamping range | 48 x 1 - 6.5 mm |

KEL-DP 24|50 A gy


| | | | |
|------------------------|--------------------------------|-------------------------|------------------------|
| Part No. | 43520 | Width | 44 mm |
| EAN | 4251269309915 | Height | 12 |
| Package quantity | 10 | Mounting height | 5 mm |
| For max. no. of cables | 50 | Cut-out size | 112 × 36 mm |
| Max. cable diameter | 8,3 mm | For min. wall thickness | 1,5 mm |
| Colour | grey (similar RAL 7035) | For max. wall thickness | 2,5 mm |
| Length | 142 mm | For wall thickness | 1,5 - 2,5 mm |
| | | Clamping range | 33 x 1 - 5.3 mm |
| | | | 9 x 1 - 6.4 mm |
| | | | 8 x 1 - 8.3 mm |

KEL-DP 24|50 B gy


| | | | |
|------------------------|--------------------------------|-------------------------|------------------------|
| Part No. | 43527 | Width | 44 mm |
| EAN | 4251269309984 | Height | 12 |
| Package quantity | 10 | Mounting height | 5 mm |
| For max. no. of cables | 50 | Cut-out size | 112 × 36 mm |
| Max. cable diameter | 8,3 mm | For min. wall thickness | 2,8 mm |
| Colour | grey (similar RAL 7035) | For max. wall thickness | 4 mm |
| Length | 142 mm | Clamping range | 33 x 1 - 5.3 mm |
| | | | 9 x 1 - 6.4 mm |
| | | | 8 x 1 - 8.3 mm |

KEL-DP 24|50 A bk


| | | | |
|------------------------|----------------------|-------------------------|------------------------|
| Part No. | 50520 | Width | 44 mm |
| EAN | 4251269314698 | Height | 12 |
| Package quantity | 10 | Mounting height | 5 mm |
| For max. no. of cables | 50 | Cut-out size | 112 × 36 mm |
| Max. cable diameter | 8,3 mm | For min. wall thickness | 1,5 mm |
| Colour | black | For max. wall thickness | 2,5 mm |
| Length | 142 mm | For wall thickness | 1,5 - 2,5 mm |
| | | Clamping range | 33 x 1 - 5.3 mm |
| | | | 9 x 1 - 6.4 mm |
| | | | 8 x 1 - 8.3 mm |

KEL-DP 24|50 B bk


| | | | |
|------------------------|----------------------|-------------------------|--|
| Part No. | 50527 | Width | 44 mm |
| EAN | 4251269314766 | Height | 12 |
| Package quantity | 10 | Mounting height | 5 mm |
| For max. no. of cables | 50 | Cut-out size | 112 x 36 mm |
| Max. cable diameter | 8,3 mm | For min. wall thickness | 2,8 mm |
| Colour | black | For max. wall thickness | 4 mm |
| Length | 142 mm | Clamping range | 33 x 1 - 5.3 mm 9 x 1 - 6.4 mm 8 x 1 - 8.3 mm |

KEL-DP 16|10 A gy


| | | | |
|------------------------|--------------------------------|-------------------------|-------------------------|
| Part No. | 43460 | Width | 44 mm |
| EAN | 4251269320750 | Height | 12 mm |
| Package quantity | 10 | Mounting height | 5 mm |
| For max. no. of cables | 10 | Cut-out size | 86 x 36 mm |
| Max. cable diameter | 12,2 mm | For min. wall thickness | 1,5 mm |
| Colour | grey (similar RAL 7035) | For max. wall thickness | 2,5 mm |
| Length | 96 mm | For wall thickness | 1,5 - 2,5 mm |
| | | Clamping range | 10 x 1 - 12.2 mm |

KEL-DP 16|11 A gy


| | | | |
|------------------------|--------------------------------|-------------------------|--|
| Part No. | 43461 | Width | 44 mm |
| EAN | 4251269320767 | Height | 12 mm |
| Package quantity | 10 | Mounting height | 5 mm |
| For max. no. of cables | 11 | Cut-out size | 86 x 36 mm |
| Max. cable diameter | 12,6 mm | For min. wall thickness | 1,5 mm |
| Colour | grey (similar RAL 7035) | For max. wall thickness | 2,5 mm |
| Length | 96 mm | For wall thickness | 1,5 - 2,5 mm |
| | | Clamping range | 3 x 1 - 10.5 mm 8 x 1 - 12.6 mm |

KEL-DP 16|20 A gy


| | | | |
|------------------------|--------------------------------|-------------------------|------------------------|
| Part No. | 43462 | Width | 44 mm |
| EAN | 4251269320774 | Height | 12 mm |
| Package quantity | 10 | Mounting height | 5 mm |
| For max. no. of cables | 20 | Cut-out size | 86 x 36 mm |
| Max. cable diameter | 8,3 mm | For min. wall thickness | 1,5 mm |
| Colour | grey (similar RAL 7035) | For max. wall thickness | 2,5 mm |
| Length | 96 mm | For wall thickness | 1,5 - 2,5 mm |
| | | Clamping range | 20 x 1 - 8.3 mm |

KEL-DP 16|22 A gy

| | | | |
|------------------------|--------------------------------|-------------------------|---|
| Part No. | 43463 | Width | 44 mm |
| EAN | 4251269320781 | Height | 12 mm |
| Package quantity | 10 | Mounting height | 5 mm |
| For max. no. of cables | 22 | Cut-out size | 86 x 36 mm |
| Max. cable diameter | 6,5 mm | For min. wall thickness | 1,5 mm |
| Colour | grey (similar RAL 7035) | For max. wall thickness | 2,5 mm |
| Length | 96 mm | For wall thickness | 1,5 - 2,5 mm |
| | | Clamping range | 5 x 1 - 12.1 mm 4 x 1 - 8.3 mm 13 x 1 - 6.5 mm |


KEL-DP 16|23 A gy

| | | | |
|------------------------|--------------------------------|-------------------------|--|
| Part No. | 43464 | Width | 44 mm |
| EAN | 4251269320798 | Height | 12 mm |
| Package quantity | 10 | Mounting height | 5 mm |
| For max. no. of cables | 23 | Cut-out size | 86 x 36 mm |
| Max. cable diameter | 12,1 mm | For min. wall thickness | 1,5 mm |
| Colour | grey (similar RAL 7035) | For max. wall thickness | 2,5 mm |
| Length | 96 mm | For wall thickness | 1,5 - 2,5 mm |
| | | Clamping range | 18 x 1 - 6.5 mm 5 x 1 - 12.1 mm |

KEL-DP 16|26 A gy


Part No. **43465**
 EAN **4251269320804**
 Package quantity **10**
 For max. no. of cables **26**
 Max. cable diameter **8,3 mm**
 Colour **grey (similar RAL 7035)**
 Length **96 mm**

Width **44 mm**
 Height **12 mm**
 Mounting height **5 mm**
 Cut-out size **86 × 36 mm**
 For min. wall thickness **1,5 mm**
 For max. wall thickness **2,5 mm**
 For wall thickness **1,5 - 2,5 mm**
 Clamping range **19 x 1 - 6.5 mm**
7 x 1 - 8.3 mm

KEL-DP 10|8 A gy


Part No. **43466**
 EAN **4251269324000**
 Package quantity **10**
 For max. no. of cables **8**
 Max. cable diameter **12,6 mm**
 Colour **grey (similar RAL 7035)**
 Length **75 mm**

Width **44 mm**
 Height **12 mm**
 Mounting height **5 mm**
 Cut-out size **65 × 36 mm**
 For min. wall thickness **1,5 mm**
 For max. wall thickness **2,5 mm**
 For wall thickness **1,5 - 2,5 mm**
 Clamping range **8 x 1 - 12.6 mm**

KEL-DP 10|12 A gy


Part No. **43467**
 EAN **4251269324017**
 Package quantity **10**
 For max. no. of cables **12**
 Max. cable diameter **12,6 mm**
 Colour **grey (similar RAL 7035)**
 Length **75 mm**

Width **44 mm**
 Height **12 mm**
 Mounting height **5 mm**
 Cut-out size **65 × 36 mm**
 For min. wall thickness **1,5 mm**
 For max. wall thickness **2,5 mm**
 For wall thickness **1,5 - 2,5 mm**
 Clamping range **4 x 1 - 6.5 mm**
4 x 1 - 8.3 mm
4 x 1 - 12.6 mm

KEL-DP 10|14 A gy


Part No. **43468**
 EAN **4251269324024**
 Package quantity **10**
 For max. no. of cables **14**
 Max. cable diameter **8,3 mm**
 Colour **grey (similar RAL 7035)**
 Length **75 mm**

Width **44 mm**
 Height **12 mm**
 Mounting height **5 mm**
 Cut-out size **65 × 36 mm**
 For min. wall thickness **1,5 mm**
 For max. wall thickness **2,5 mm**
 For wall thickness **1,5 - 2,5 mm**
 Clamping range **14 x 1 - 8.3 mm**

KEL-DP 10|16 A gy


Part No. **43469**
 EAN **4251269324031**
 Package quantity **10**
 For max. no. of cables **16**
 Max. cable diameter **12,6 mm**
 Colour **grey (similar RAL 7035)**
 Length **75 mm**

Width **44 mm**
 Height **12 mm**
 Mounting height **5 mm**
 Cut-out size **65 × 36 mm**
 For min. wall thickness **1,5 mm**
 For max. wall thickness **2,5 mm**
 For wall thickness **1,5 - 2,5 mm**
 Clamping range **12 x 1 - 6.5 mm**
4 x 1 - 12.6 mm

KEL-DP 10|26 A gy


Part No. **43470**
 EAN **4251269324048**
 Package quantity **10**
 For max. no. of cables **26**
 Max. cable diameter **6,5 mm**
 Colour **grey (similar RAL 7035)**
 Length **75 mm**

Width **44 mm**
 Height **12 mm**
 Mounting height **5 mm**
 Cut-out size **65 × 36 mm**
 For min. wall thickness **1,5 mm**
 For max. wall thickness **2,5 mm**
 For wall thickness **1,5 - 2,5 mm**
 Clamping range **26 x 1 - 6.5 mm**

KEL-DP 6|6 A gy


Part No. **43450**
 EAN **4251269320712**
 Package quantity **10**
 For max. no. of cables **6**
 Max. cable diameter **12,1 mm**
 Colour **grey (similar RAL 7035)**
 Length **62 mm**

Width **44 mm**
 Height **12 mm**
 Mounting height **5 mm**
 Cut-out size **52 × 36 mm**
 For min. wall thickness **1,5 mm**
 For max. wall thickness **2,5 mm**
 For wall thickness **1,5 - 2,5 mm**
 Clamping range **6 x 1 - 12.1 mm**

KEL-DP 6|12 A gy


Part No. **43451**
 EAN **4251269320729**
 Package quantity **10**
 For max. no. of cables **12**
 Max. cable diameter **16,1 mm**
 Colour **grey (similar RAL 7035)**
 Length **62 mm**

Width **44 mm**
 Height **12 mm**
 Mounting height **5 mm**
 Cut-out size **52 × 36 mm**
 For min. wall thickness **1,5 mm**
 For max. wall thickness **2,5 mm**
 For wall thickness **1,5 - 2,5 mm**
 Clamping range **8 x 1 - 6.5 mm**
2 x 1 - 12.6 mm
2 x 1 - 16.1 mm

KEL-DP 6|14 A gy


Part No. **43452**
 EAN **4251269320736**
 Package quantity **10**
 For max. no. of cables **14**
 Max. cable diameter **10,5 mm**
 Colour **grey (similar RAL 7035)**
 Length **62 mm**

Width **44 mm**
 Height **12 mm**
 Mounting height **5 mm**
 Cut-out size **52 × 36 mm**
 For min. wall thickness **1,5 mm**
 For max. wall thickness **2,5 mm**
 For wall thickness **1,5 - 2,5 mm**
 Clamping range **10 x 1 - 6.5 mm**
4 x 1 - 10.5 mm

KEL-DP 6|25 A gy

Part No. **43453**
 EAN **4251269320743**
 Package quantity **10**
 For max. no. of cables **25**
 Max. cable diameter **8,3 mm**
 Colour **grey (similar RAL 7035)**
 Length **62 mm**

Width **44 mm**
 Height **12 mm**
 Mounting height **5 mm**
 Cut-out size **52 × 36 mm**
 For min. wall thickness **1,5 mm**
 For max. wall thickness **2,5 mm**
 For wall thickness **1,5 - 2,5 mm**
 Clamping range **21 x 1 - 5 mm**
4 x 1 - 8.3 mm


KEL-DP-E 46|7 gy

Part No. **43585**
 EAN **4251269310287**
 Package quantity **10**
 For max. no. of cables **7**
 Max. cable diameter **8,3 mm**
 Colour **grey (similar RAL 7035)**
 Length **62 mm**


Width **25 mm**
 Height **12 mm**
 Mounting height **5 mm**
 Cut-out size **46 × 18 mm**
 For min. wall thickness **1,5 mm**
 For max. wall thickness **2,5 mm**
 For wall thickness **1,5 - 2,5 mm**
 Clamping range **5 x 1 - 8.3 mm**
2 x 1 - 6.5 mm

KEL-DP-E 46|7 bk

| | | | |
|------------------------|----------------------|-------------------------|--|
| Part No. | 50585 | Width | 25 mm |
| EAN | 4251269315008 | Height | 12 mm |
| Package quantity | 10 | Mounting height | 5 mm |
| For max. no. of cables | 7 | Cut-out size | 46 × 18 mm |
| Max. cable diameter | 8,3 mm | For min. wall thickness | 1,5 mm |
| Colour | black | For max. wall thickness | 2,5 mm |
| Length | 62 mm | For wall thickness | 1,5 - 2,5 mm |
| | | Clamping range | 5 x 1 - 8.3 mm 2 x 1 - 6.5 mm |

KEL-DP-E 46|9 gy

| | | | |
|------------------------|--------------------------------|-------------------------|---|
| Part No. | 43587 | Width | 25 mm |
| EAN | 4251269310294 | Height | 12 mm |
| Package quantity | 10 | Mounting height | 5 mm |
| For max. no. of cables | 9 | Cut-out size | 46 × 18 mm |
| Max. cable diameter | 12,1 mm | For min. wall thickness | 1,5 mm |
| Colour | grey (similar RAL 7035) | For max. wall thickness | 2,5 mm |
| Length | 62 mm | For wall thickness | 1,5 - 2,5 mm |
| | | Clamping range | 8 x 1 - 6.5 mm 1 x 1 - 12.1 mm |

KEL-DP-E 46|9 bk

| | | | |
|------------------------|----------------------|-------------------------|---|
| Part No. | 50587 | Width | 25 mm |
| EAN | 4251269315015 | Height | 12 mm |
| Package quantity | 10 | Mounting height | 5 mm |
| For max. no. of cables | 9 | Cut-out size | 46 × 18 mm |
| Max. cable diameter | 12,1 mm | For min. wall thickness | 1,5 mm |
| Colour | black | For max. wall thickness | 2,5 mm |
| Length | 62 mm | For wall thickness | 1,5 - 2,5 mm |
| | | Clamping range | 8 x 1 - 6.5 mm 1 x 1 - 12.1 mm |

KEL-DP-E 86|13 gy

| | | | |
|------------------------|--------------------------------|-------------------------|---|
| Part No. | 43581 | Width | 25 mm |
| EAN | 4251269310263 | Height | 12 mm |
| Package quantity | 10 | Mounting height | 5 mm |
| For max. no. of cables | 13 | Cut-out size | 85 × 18 mm |
| Max. cable diameter | 8,3 mm | For min. wall thickness | 1,5 mm |
| Colour | grey (similar RAL 7035) | For max. wall thickness | 2,5 mm |
| Length | 102 mm | For wall thickness | 1,5 - 2,5 mm |
| | | Clamping range | 11 x 1 - 8.3 mm 2 x 1 - 6.5 mm |

KEL-DP-E 86|13 bk

| | | | |
|------------------------|----------------------|-------------------------|---|
| Part No. | 50581 | Width | 25 mm |
| EAN | 4251269314988 | Height | 12 mm |
| Package quantity | 10 | Mounting height | 5 mm |
| For max. no. of cables | 13 | Cut-out size | 85 × 18 mm |
| Max. cable diameter | 8,3 mm | For min. wall thickness | 1,5 mm |
| Colour | black | For max. wall thickness | 2,5 mm |
| Length | 102 mm | For wall thickness | 1,5 - 2,5 mm |
| | | Clamping range | 11 x 1 - 8.3 mm 2 x 1 - 6.5 mm |

KEL-DP-E 86|17 gy

| | | | |
|------------------------|--------------------------------|-------------------------|--|
| Part No. | 43583 | Width | 25 mm |
| EAN | 4251269310270 | Height | 12 mm |
| Package quantity | 10 | Mounting height | 5 mm |
| For max. no. of cables | 17 | Cut-out size | 85 × 18 mm |
| Max. cable diameter | 12,1 mm | For min. wall thickness | 1,5 mm |
| Colour | grey (similar RAL 7035) | For max. wall thickness | 2,5 mm |
| Length | 102 mm | For wall thickness | 1,5 - 2,5 mm |
| | | Clamping range | 16 x 1 - 6.5 mm 1 x 1 - 12.1 mm |

KEL-DP-E 86|17 bk

| | | | |
|------------------------|----------------------|-------------------------|--|
| Part No. | 50583 | Width | 25 mm |
| EAN | 4251269314995 | Height | 12 mm |
| Package quantity | 10 | Mounting height | 5 mm |
| For max. no. of cables | 17 | For min. wall thickness | 1,5 mm |
| Max. cable diameter | 12,1 mm | For max. wall thickness | 2,5 mm |
| Colour | black | For wall thickness | 1,5 - 2,5 mm |
| Length | 102 mm | Clamping range | 16 x 1 - 6.5 mm 1 x 1 - 12.1 mm |

KEL-DP-E 112|16 gy

| | | | |
|------------------------|--------------------------------|-------------------------|---|
| Part No. | 43576 | Width | 25 mm |
| EAN | 4251269310249 | Height | 12 mm |
| Package quantity | 10 | Mounting height | 5 mm |
| For max. no. of cables | 16 | Cut-out size | 112 × 18 mm |
| Max. cable diameter | 12,1 mm | For min. wall thickness | 1,5 mm |
| Colour | grey (similar RAL 7035) | For max. wall thickness | 2,5 mm |
| Length | 128 mm | For wall thickness | 1,5 - 2,5 mm |
| | | Clamping range | 4 x 1 - 6.5 mm 11 x 1 - 8.3 mm 1 x 1 - 12.1 mm |

KEL-DP-E 112|16 bk


| | | | |
|------------------------|----------------------|-------------------------|---|
| Part No. | 50576 | Width | 25 mm |
| EAN | 4251269314964 | Height | 12 mm |
| Package quantity | 10 | Mounting height | 5 mm |
| For max. no. of cables | 16 | Cut-out size | 112 × 18 mm |
| Max. cable diameter | 12,1 mm | For min. wall thickness | 1,5 mm |
| Colour | black | For max. wall thickness | 2,5 mm |
| Length | 128 mm | For wall thickness | 1,5 - 2,5 mm |
| | | Clamping range | 4 x 1 - 6.5 mm 11 x 1 - 8.3 mm 1 x 1 - 12.1 mm |

KEL-DP-E 112|21 gy

| | | | |
|------------------------|--------------------------------|-------------------------|---|
| Part No. | 43578 | Width | 25 mm |
| EAN | 4251269310256 | Height | 12 mm |
| Package quantity | 10 | Mounting height | 5 mm |
| For max. no. of cables | 21 | Cut-out size | 112 × 18 mm |
| Max. cable diameter | 12,1 mm | For min. wall thickness | 1,5 mm |
| Colour | grey (similar RAL 7035) | For max. wall thickness | 2,5 mm |
| Length | 128 mm | For wall thickness | 1,5 - 2,5 mm |
| | | Clamping range | 16 x 1 - 6.5 mm 4 x 1 - 8.3 mm 1 x 1 - 12.1 mm |

KEL-DP-E 112|21 bk

| | | | |
|------------------------|----------------------|-------------------------|------------------------|
| Part No. | 50578 | Width | 25 mm |
| EAN | 4251269314971 | Height | 12 mm |
| Package quantity | 10 | Mounting height | 5 mm |
| For max. no. of cables | 21 | Cut-out size | 112 x 18 mm |
| Max. cable diameter | 12,1 mm | For min. wall thickness | 1,5 mm |
| Colour | black | For max. wall thickness | 2,5 mm |
| Length | 128 mm | For wall thickness | 1,5 - 2,5 mm |
| | | Clamping range | 16 x 1 - 6.5 mm |
| | | | 4 x 1 - 8.3 mm |
| | | | 1 x 1 - 12.1 mm |

KEL-DP-S 69|8 gy

| | | | |
|------------------------|--------------------------------|-------------------------|-----------------------|
| Part No. | 43591 | Width | 19,5 mm |
| EAN | 4251269310300 | Height | 12 mm |
| Package quantity | 10 | Mounting height | 5 mm |
| For max. no. of cables | 8 | Cut-out size | 69 x 10 mm |
| Max. cable diameter | 7,5 mm | For min. wall thickness | 1,5 mm |
| Colour | grey (similar RAL 7035) | For max. wall thickness | 2,5 mm |
| Length | 78 mm | For wall thickness | 1,5 - 2,5 mm |
| | | Clamping range | 8 x 1 - 7.5 mm |

KEL-DP-S 69|8 bk

| | | | |
|------------------------|----------------------|-------------------------|-----------------------|
| Part No. | 50591 | Width | 19,5 mm |
| EAN | 4251269315022 | Height | 12 mm |
| Package quantity | 10 | Mounting height | 5 mm |
| For max. no. of cables | 8 | Cut-out size | 69 x 10 mm |
| Max. cable diameter | 7,5 mm | For min. wall thickness | 1,5 mm |
| Colour | black | For max. wall thickness | 2,5 mm |
| Length | 78 mm | For wall thickness | 1,5 - 2,5 mm |
| | | Clamping range | 8 x 1 - 7.5 mm |